















# T45 (1 3/4") Thread

## Button bit

Button bit	Dimensions D		Flushing hole (mm)		Buttons (mm)		Angle	Class	Part no.	
	mm	in	Front No size	Gauge No size	Front No size	Gauge No size				
		70	2 3/4	2×8	2×6	4×11	8×11	35°	H	3070T4512
		76	3	2×9	2×7	4×11	8×12	35°	H	3076T4512
		89	3 1/2	2×13	2×8	5×12	8×14	35°	H	3089T4513
		102	4	2×13	–	6×13	8×14	35°	H	30102T4514
		115	4 1/2	4×13	–	6×14	8×16	35°	H	30115T45F14
		70	2 3/4	4×8	–	5×10	8×11	35°	M	3070T4513D
		76	3	4×8	–	5×11	8×12	35°	M	3076T4513D
		89	3 1/2	4×9	–	6×12	8×14	35°	M	3089T4514D
		102	4	4×11	–	6×13	8×14	35°	M	30102T4514D
		115	4 1/2	4×13	–	6×14	8×16	35°	M	30115T4514D
		70	2 3/4	2×8	2×6	4×11	8×11	35°	H	3070T4512R
		76	3	2×9	2×7	4×12	8×12	35°	H	3076T4512R
		89	3 1/2	2×11	2×8	6×12	8×14	35°	H	3089T45F14R
		102	4	4×11	–	6×13	8×14	35°	H	30102T45F14R
		115	4 1/2	4×13	–	6×14	8×16	35°	H	30115T45F14R
		76	3	4×8	–	5×11	8×12	35°	M	3076T4513DR
		89	3 1/2	4×10	–	6×12	8×14	35°	M	3089T4514DR
		102	4	4×11	–	6×13	8×14	35°	M	30102T4514DR
		115	4 1/2	4×13	–	6×14	8×16	35°	M	30115T4514DR

Bench & long  
hole drilling

# Bench & long hole Drilling

T45 (1 3/4")  
Thread


## Cross bit



Dimensions D		Flushing hole (mm)		Buttons (mm)		Angle	Class	Part no.
mm	in	Front No size	Gauge No size	Front No size	Gauge No size			
76	3	1×8	2×8	-	-	-	-	3276T45
89	3 1/2	1×9	2×9	-	-	-	-	3289T45


## Reaming tools

### Dome bit

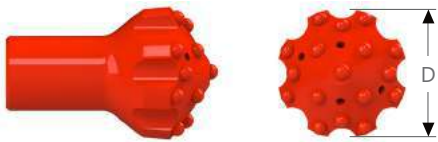

127	5	4×8	2×9	1×14	16×14	35°	-	30127T4517KD
-----	---	-----	-----	------	-------	-----	---	--------------

### Cut holes/Dome bit

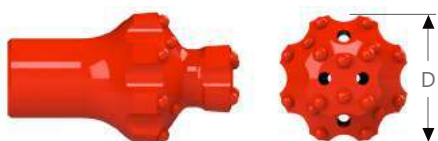

127	5	2×13	2×11	10×13	8×14	35°	-	30127T4518KC
-----	---	------	------	-------	------	-----	---	--------------

## Drill rod

### Rod Ø45 with threads T45/T45



Dimensions L			Dimensions D		Part no.
mm	ft	in	mm	in	
3050	10	-	45	1 3/4	2045T4530
3660	12	-	45	1 3/4	2045T4536
4270	14	-	45	1 3/4	2045T4542
4880	16	-	45	1 3/4	2045T4548
6100	20	-	45	1 3/4	2045T4561

### Rod Ø45 with threads T45/T45 (MF)



1525	5	-	45	1 3/4	2045T45MF15
1830	6	-	45	1 3/4	2045T45MF18
3050	10	-	45	1 3/4	2045T45MF30
3660	12	-	45	1 3/4	2045T45MF36
4270	14	-	45	1 3/4	2045T45MF42


# T45 (1 3/4") Thread

## Coupling

T45-45



Crossover coupling T45-T38

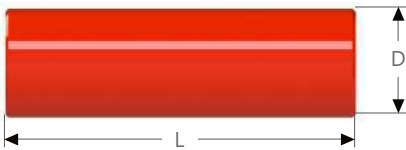

Crossover coupling T45-T51



	Dimensions L			Dimensions D		Part no.
	mm	ft	in	mm	in	
T45-45	207	8	1/8	66	2 3/5	MX-T456620
Crossover coupling T45-T38	215	8	1/2	66	2 1/2	MX-T45T386621
Crossover coupling T45-T51	240	9	1/2	72	2 7/8	MX-T45T517224

Bench & long  
hole drilling

# "Globe Drilling Industry Experts"

No matter what kinds of soft rock, loose-medium rock, hard rock and any other special formations, just tell us what you need, our special tailored service is waiting for you upon you demand.



## **KEMAICO USA CORPORATION**

Add: 300 Knightsbridge Pkwy Ste. 113 Lincolnshire, IL 60069

Tel: 1-847-9136878

Fax: 1-847-9136879

Email: [office@kemaico.us](mailto:office@kemaico.us)

[info@kemaico.us](mailto:info@kemaico.us)

Web: [www.kemaico.us](http://www.kemaico.us)